


FRONT VIEW

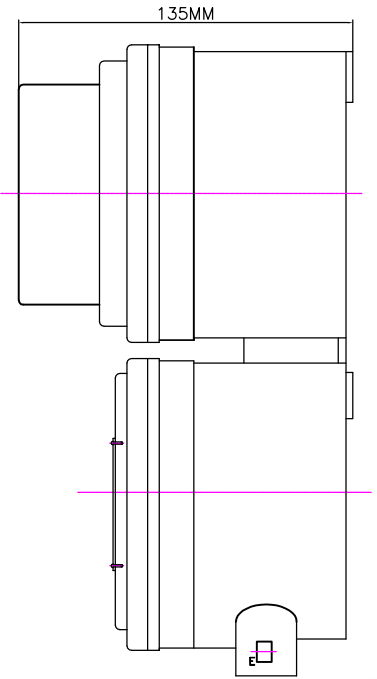

SECTION VIEW

EXPLOSION PROOF ROTARY SWITCH WITH PAD LOCK

TECHNICAL SPECIFICATION

Type of Ex-Protection	EEx-d Type, IS/IEC60079-1:2007
Zone Classification	Zone 1 & Zone 2
Gas Group	IIA, IIB, T6 IS/IEC60079-0:2004
Ingress IP Protection	Ip66 IS/IEC60529-1:2001
Material of contraction	Cast Aluminum Alloy Lm6
Paint	Epoxy Polyester Powder Coating
Earthing	Internal -01 No. External -02 Nos.
Cable Entry	3/4" ET (M20) - 02 Nos.
Hardware	Stainless Steel
Switch AMP Rating	UPTO 32 AMP
Voltage	250 Volts Double Phase / 500Volts Three Phase